




Job No.:	RE	Polarization:	Vertical
Standard:	EN55032 Class B (QP) 3m	Device(#)	#1
Test item:	Radiation Test	Date:	2025/12/29
Temp.(°C)/Hum.(%):	26 / 54 %	Time:	14:07:24
Company:	海格森	Engineer Signature:	钱子旭
Trade Name:		Distance:	
Model:	RP01A-RK3588S2-5D32-V1.0		

Test Mode/Description: USB播放+HDMI+耳机+网线

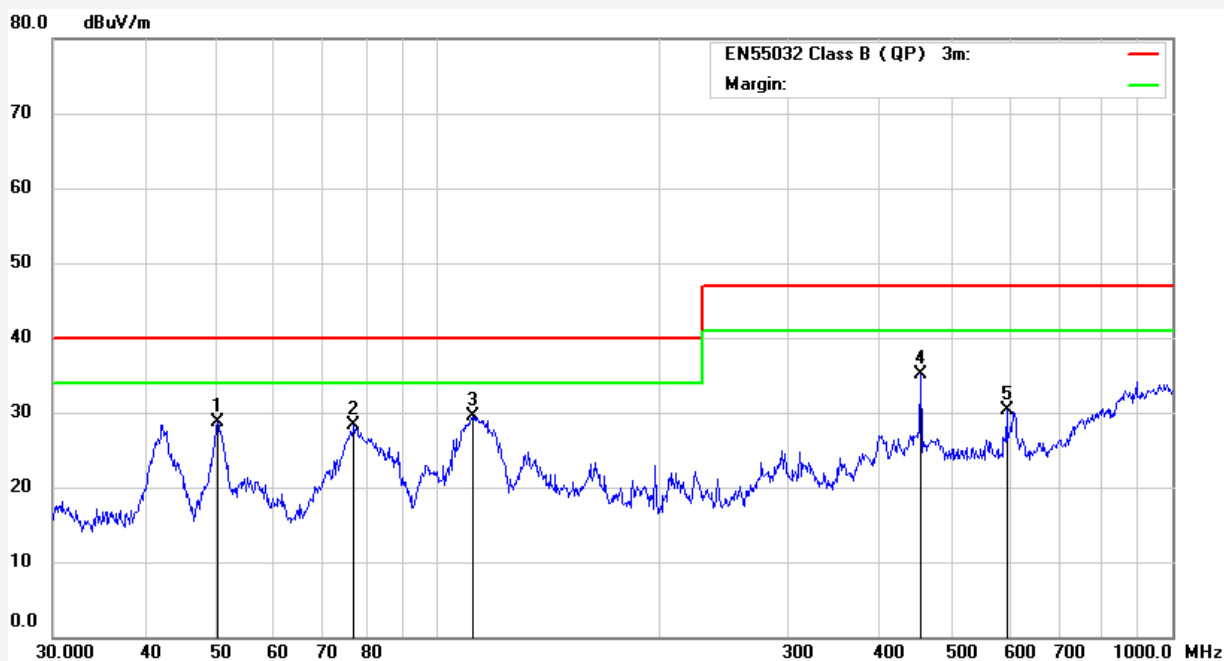


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	50.2324	49.06	-20.27	28.79	40.00	-11.21	peak	P	
2	77.0505	51.62	-23.22	28.40	40.00	-11.60	peak	P	
3	111.7379	51.52	-22.05	29.47	40.00	-10.53	peak	P	
4	454.3099	46.44	-11.38	35.06	47.00	-11.94	peak	P	
5	595.1327	43.02	-12.72	30.30	47.00	-16.70	peak	P	



Job No.:	RE	Polarization:	Horizontal
Standard:	EN55032 Class B (QP) 3m	Device(#)	#1
Test item:	Radiation Test	Date:	2025/12/29
Temp.(°C)/Hum.(%):	26 / 54 %	Time:	14:13:28
Company:	海格森	Engineer Signature:	钱子旭
Trade Name:		Distance:	
Model:	RP01A-RK3588S2-5D32-V1.0		

Test Mode/Description: USB播放+HDMI+耳机+网线

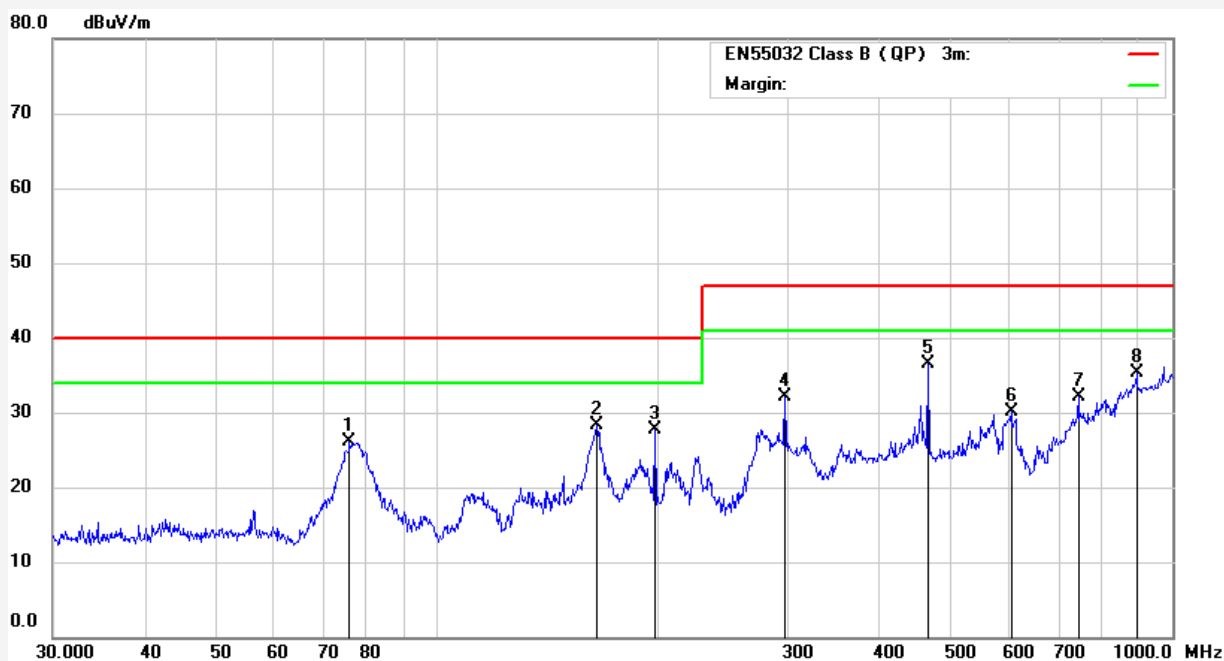

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	75.9773	49.70	-23.62	26.08	40.00	-13.92	peak	P	
2	164.9075	46.07	-17.67	28.40	40.00	-11.60	peak	P	
3	197.8928	49.48	-21.85	27.63	40.00	-12.37	peak	P	
4	297.2241	48.86	-16.79	32.07	47.00	-14.93	peak	P	
5	465.5994	48.14	-11.66	36.48	47.00	-10.52	peak	P	
6	603.5392	42.58	-12.39	30.19	47.00	-16.81	peak	P	
7	744.8661	39.88	-7.81	32.07	47.00	-14.93	peak	P	
8	893.8567	38.69	-3.46	35.23	47.00	-11.77	peak	P	