




Conducted Emission Measurement

CE S1A-BM1688-4D32-V0

Data :#1

Date: 2025/8/22

Time: 9:14:02

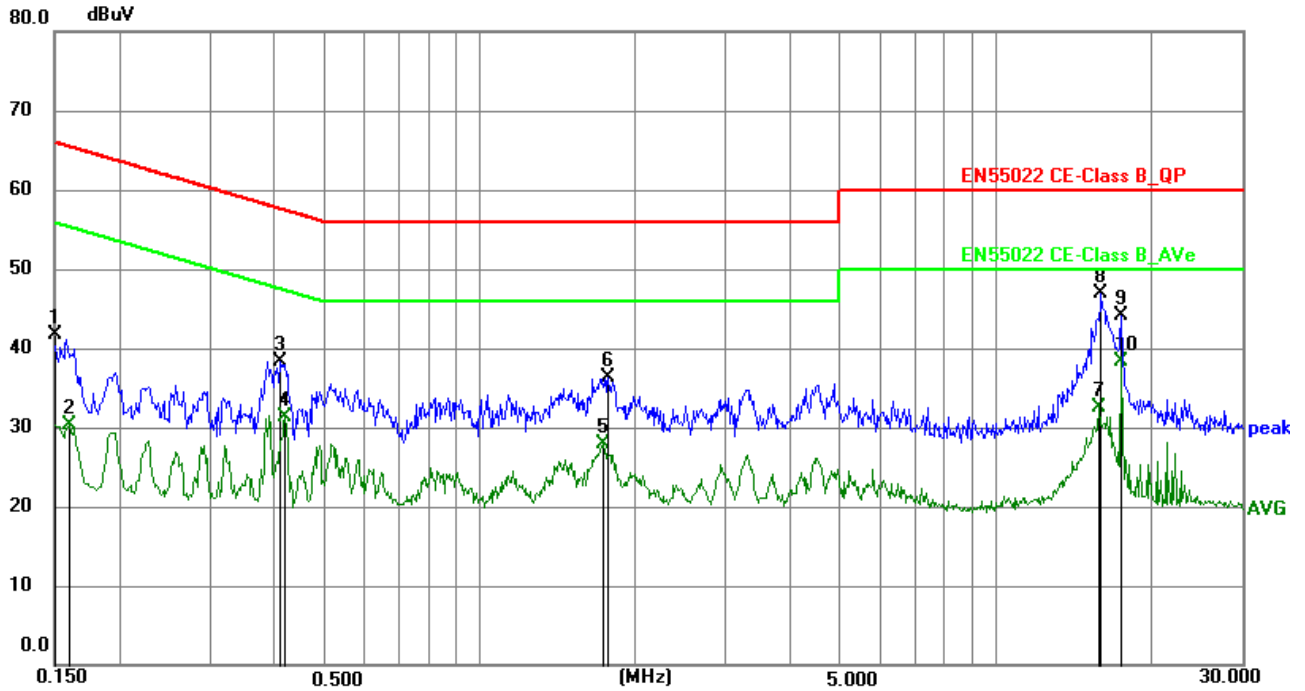

Site LAB

Limit: EN55022 CE-Class B_QP

EUT: 海格森

M/N: S1A-BM1688-4D32-V0.9

Mode: 正常工作+HDMI

Note:

Phase:

L1

Temperature: (C)

Power:

Humidity: %RH

Engineer Signature: 钱子旭

Device(#): **#1**

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	31.70	10.01	41.71	66.00	-24.29	peak	P	
2	0.1600	20.33	10.01	30.34	55.46	-25.12	AVG	P	
3	0.4120	28.24	10.02	38.26	57.61	-19.35	peak	P	
4	0.4200	21.30	10.02	31.32	47.45	-16.13	AVG	P	
5	1.7360	17.87	10.03	27.90	46.00	-18.10	AVG	P	
6	1.7720	26.24	10.03	36.27	56.00	-19.73	peak	P	
7	15.8400	22.51	10.06	32.57	50.00	-17.43	AVG	P	
8	16.0479	36.82	10.06	46.88	60.00	-13.12	peak	P	
9	17.4880	33.96	10.06	44.02	60.00	-15.98	peak	P	
10 *	17.4880	28.29	10.06	38.35	50.00	-11.65	AVG	P	




Conducted Emission Measurement

CE S1A-BM1688-4D32-V0

Data :#2

Date: 2025/8/22

Time: 9:17:01

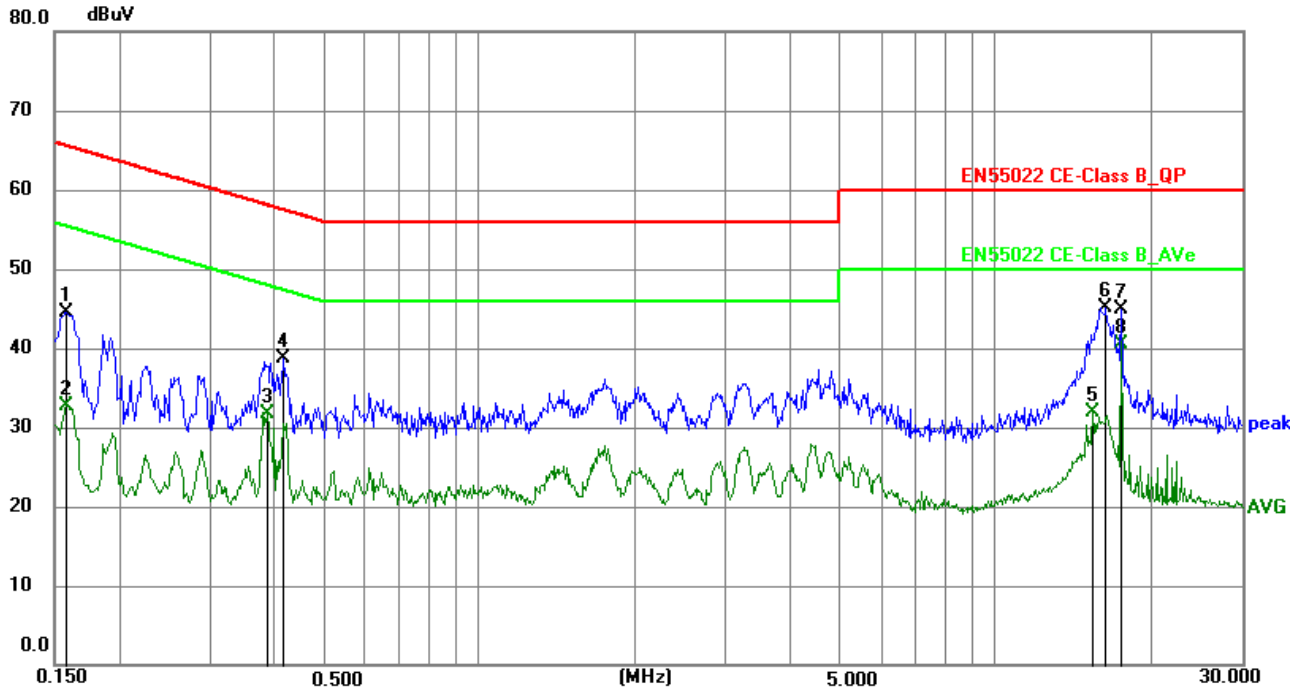

Site LAB

Limit: EN55022 CE-Class B_QP

EUT: 海格森

M/N: S1A-BM1688-4D32-V0.9

Mode: 正常工作+HDMI

Note:

Phase:

L1

Temperature: (C)

Power:

Humidity: %RH

Engineer Signature: 钱子旭

Device(#): #1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1580	34.49	10.01	44.50	65.57	-21.07	peak	P	
2	0.1580	22.79	10.01	32.80	55.57	-22.77	AVG	P	
3	0.3880	21.60	10.01	31.61	48.11	-16.50	AVG	P	
4	0.4180	28.74	10.02	38.76	57.49	-18.73	peak	P	
5	15.4320	21.82	10.06	31.88	50.00	-18.12	AVG	P	
6	16.3680	35.08	10.06	45.14	60.00	-14.86	peak	P	
7	17.4880	34.75	10.06	44.81	60.00	-15.19	peak	P	
8 *	17.4880	30.49	10.06	40.55	50.00	-9.45	AVG	P	